



**SUNPOWER TECHNOLOGY CORP.**  
 33485 WESTERN AVE. UNION CITY, CA 94587, UNITED STATES  
 TEL: 510.489.5088 FAX: 510.489.8966  
 http://www.sunpower-usa.com  
 E-mail: sales@sunpower-usa.com

# SPW-6300P1

Active P.F.C Function

300W, Six Output

For Industrial ATX1U System



83 x 250 x 40.5 mm  
 3.3 x 9.9 x 1.6 inch



**CB CE R**

### Features:

Universal full range AC input with active PFC, P.F.> 0.95
+3.3V, +5V main output remote sensing
Over load, over voltage & short circuit protection
Built-in long life ball bearing fan
100% 50 burn-in test
Meet Intel ATX 2.01 / ATX2.03 / ATX 12V / EPS
UL, cUL, TUV, CB, CE certified
1 years warranty


### Specification:

	V1	V2	V3	V4	V5	V6	
OUTPUT	Voltage	+3.3V	+5V	+12V	-5V	-12V	+5Vsb
	Min. Load	0A	0.5A			0A	
	Max. Load	20A	28A	16A	0.5A	1A	2A
	Regulation	±5%	+5/-4%		±5%	+8/-5%	±5%
	Ripple Noise(max)	50mV		120mV	50mV	120mV	50mV
	Efficiency (typ)	70%					
Max Power	+3.3V & +5V max 140W, total output max 300W,						
INPUT	Voltage	90V ~ 264V universal full range, single phase					
	Frequency	47 ~ 63 Hz					
	Current	<5.0A @ 100V AC input, full load condition					
	Inrush Current	<40A@115V / <80A@230V AC input, full load condition. Cold start at 25 ambient					
	Leakage Current	<1.5mA@264V AC input					
Power Factor	Meet IEC 1000-3-2 class D, P.F.>0.95						
PROTECTION	Over Load Protection	Over 105% ~ 180% of rating, shutdown					
	Over Voltage Protection	+3.3V: +3.8V~+4.6V, +5V: +5.8V~+7.0V, +12V: +13.8V~+17.5V					
	Short Circuit Protection	Shutdown					
OTHERS	Setup time	----					
	Rise time	<30mS					
	Hold up time	>20mS@230V					
	TTL Signal	Power Good Signal, PS-ON Signal					
	Cooling	Two 10CFM (min.) DC ball bearing Fan					
Environment	Temperature	Operating: 0~70 ; derating: 45 ~70 : 2.5%/ . Storage: -10~+75					
	Humidity	Operating: 20% ~ 85%; Storage: 10% ~ 95% (non condensing)					
M.T.B.F.	120K hours						
SAFETY	UL 60950, CSA C22.2 No.60950, TUV EN 60950, IEC 60950, EMKO -TSE (74-SEC)207/94 Certified						
EMC	EMI	FCC CFR 47 PART 15 CLASS B, EN 50081-1, CNS 13438 CALSS B.					
	EMS	EN 50082-1 (1997)					



SUNPOWER TECHNOLOGY CORP.  
 33485 WESTERN AVE. UNION CITY, CA 94587, UNITED STATES  
 TEL: 510.489.5088 FAX: 510.489.8966  
<http://www.sunpower-usa.com>  
 E-mail: sales@sunpower-usa.com

Dimension:

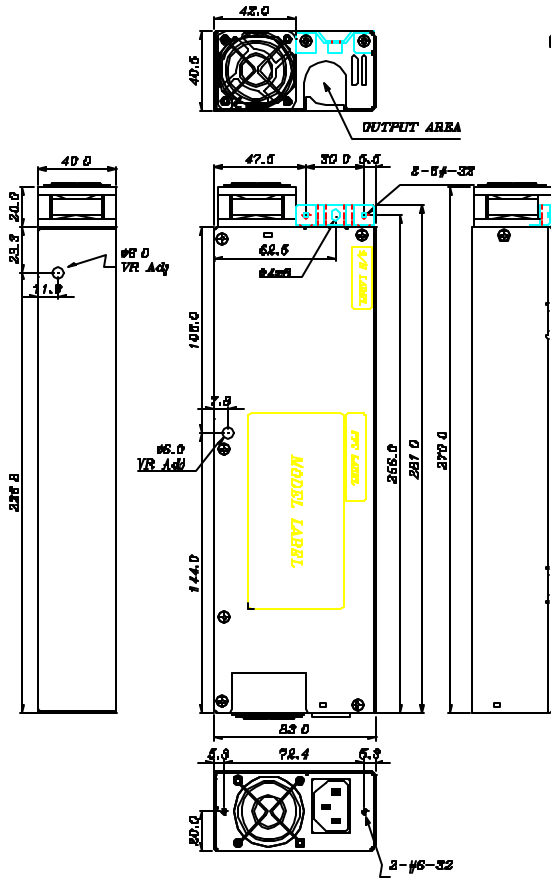

OUTPUT AREA

